



| Topic | Information |
|---|---|
| <p>DBeaver connection to databases</p> | <p>Direct access can be achieved using the following login information and a PostgreSQL-driver database tool such as DBeaver:</p> <p>Host Address: cpucexante.cwuijxcexyp.us-east-1.rds.amazonaws.com Public Username: sptviewer Public Password:deereddev</p> <p>Connection to the Preliminary Ex Ante Review (PEAR) database, a.k.a. currentbp, is achieved using DBeaver settings as shown in the snapshot that follows:</p>  <p>Connection to the ExAnte database (the database of record), a.k.a. exante, is achieved using DBeaver settings as shown in the snapshot that follows:</p> |

Connection "PostgreSQL - exante" configuration

Connection settings
PostgreSQL connection settings

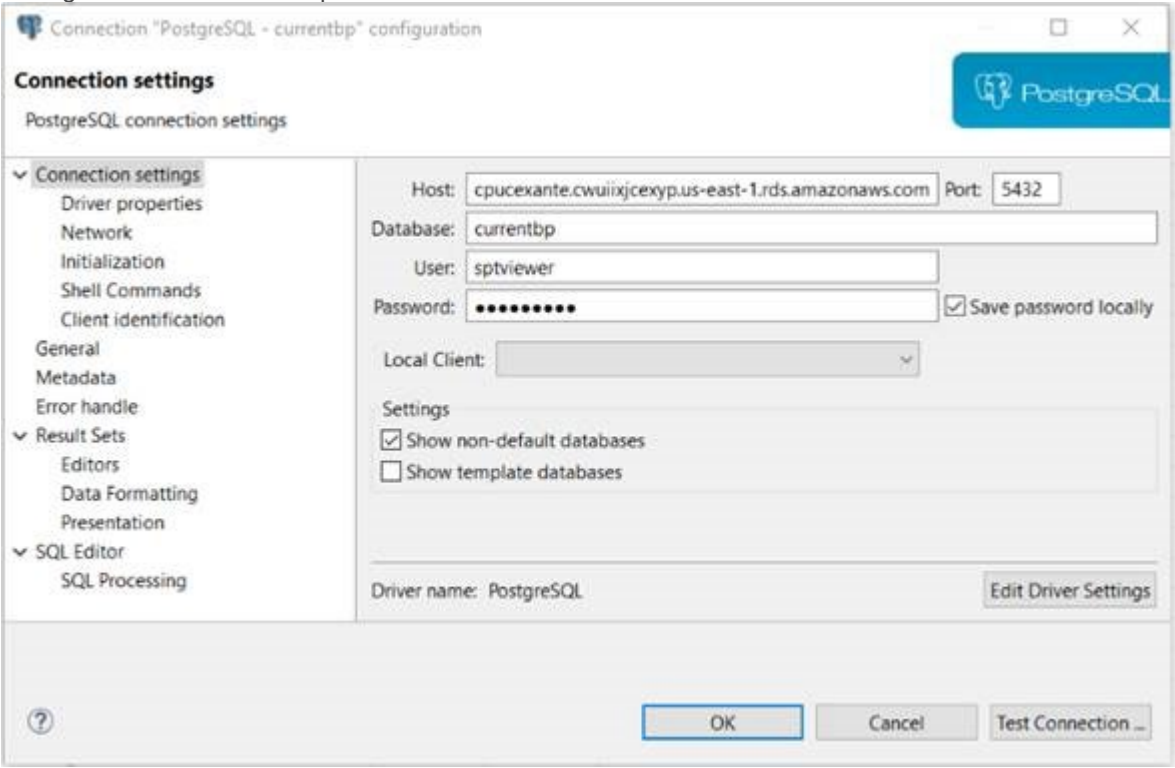

- Connection settings
 - Driver properties
 - Network
 - Initialization
 - Shell Commands
 - Client identification
- General
 - Metadata
 - Error handle
- Result Sets
 - Editors
 - Data Formatting
 - Presentation
- SQL Editor
 - SQL Processing

Host: Port:

Database:

User:

Password: Save password locally

Local Client:

Settings

- Show non-default databases
- Show template databases

Driver name: PostgreSQL